



Meter. Reader 2.0

QUICK INSTALLATION GUIDE V1.0

LoRa Alliance™ Member

1. Connect the sensor to the RJ12 socket in the device.

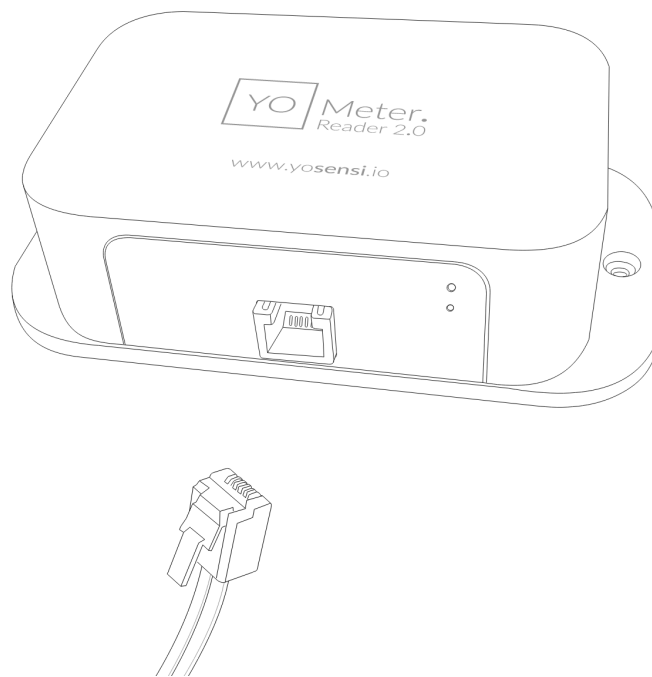


Figure 1 Connecting sensor to the device.

2. Unscrew the device: remove 4 screws from the enclosure.

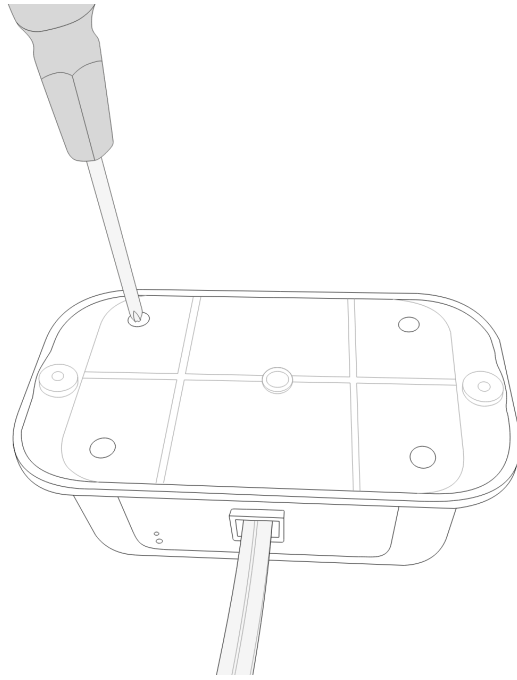


Figure 2 Back view of the device.

3. Place three LR6 (AA) batteries in the device according to the polarity indicated on the battery holder.

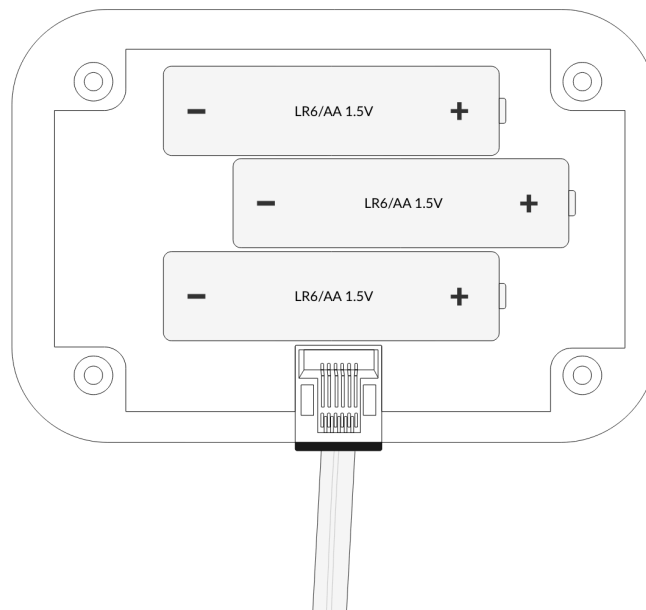


Figure 3 Battery placement instructions.

4. Assemble the device and screw it back together.